




GENERAL AG APPLICATIONS

Built to provide an excellent combination of traction and comfort with minimal soil disturbance

SPECIALTY APPLICATIONS

Available for selected models/series

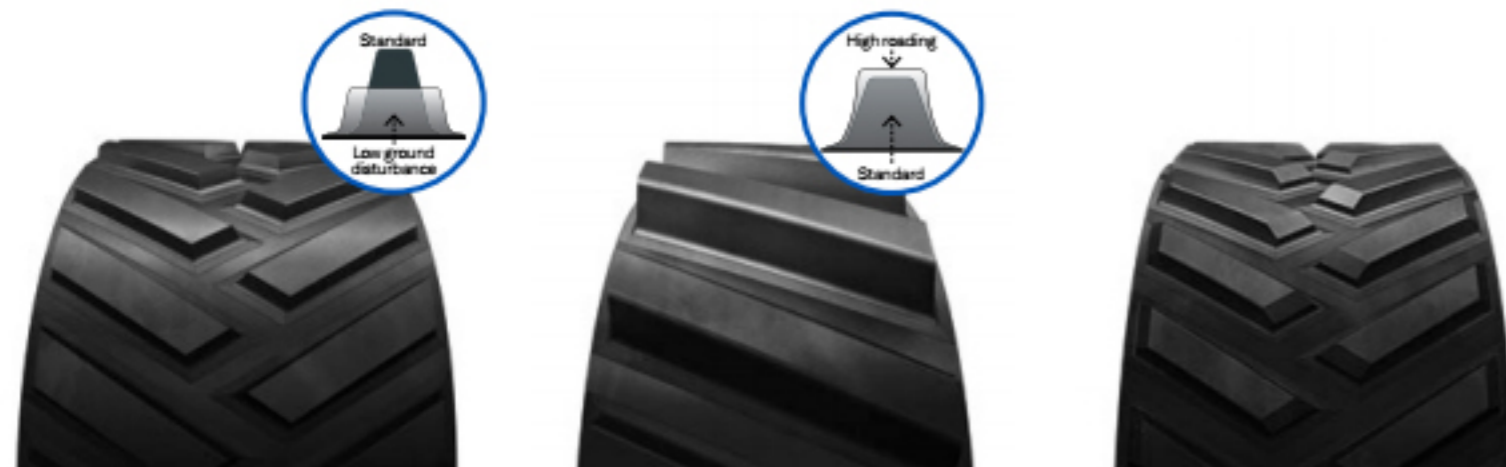

LOW GROUND DISTURBANCE

Optimized for maximum weight distribution for minimal soil disturbance or berming

Shallow and wide tip width treadbar

- Low profile tight pitch
- Provides 40% more treadbar than standard tracks
- Contact patch is over 100% larger than an equivalent standard track

Traction

Less Compaction

Roading Ability



HIGH ROADING

Optimized tread life, ride quality and control for roading operation or high pulling on hard ground

Diagonal tread pattern and chevron tapered wide tip width treadbar

- Added tread volume
- Increases carcass stiffness
- Provides up to 10% more surface area

Traction

Less Compaction

Roading Ability



SCRAPER

Built to withstand the toughest commercial or agricultural scraper conditions with maximum service life

Trackshield™: 45% increased puncture and wear resistance (over 5500)

6.7 mm cable: 24% increased tear resistance (over 5.4 mm)

GUIDE LUGS

Maximizes guiding surface

- Optimized lug geometry

AVAILABLE ON

4500 Increases side load performance

6500 Operating in side hill application greatly increases lug life

EXCLUSIVE ENDLESS SINGLE CURE TECHNOLOGY

Ensures uniform tension throughout the track

- Consistent cable position to minimize internal stress
- Specific rubber positioned consistently at targeted areas
- No carcass distortion

TREAD BAR

Provides perfect balance between traction, cleanout and minimized ground disturbance. Optimized for even tread wear and reduced vibration generating an unmatched ride quality

- Chevron tapered and diagonal treadbar design

TRACKSHIELD™ CARCASS

Increases the life of your track

- Provides a wear and puncture-resistant carcass

AVAILABLE ON

4500 +20% improvement (over 3500)

6500 +45% improvement (over 5500)

INDUSTRY-LEADING MAIN CABLE

Resists high tensions

- The biggest and strongest cables on the market

AVAILABLE ON

6500 6.7 mm cable: 24% increase in tear resistance (over 5.4 mm)

RUBBER COMPOUNDS

Improves resistance to cutting, gouging and tearing

Slows rubber wearing, aging and cracking

- Combination of up to 6 specific compounds (treads, carcass, guide lugs)

